ENUTV-2

Encore USB TV Tuner Box

ENUTV-2 is a USB 2.0 compliant TV Tuner Box. Complete with an IR Remote Controller. It supports current analog TV standard to let users have an instant TV entertainment though the USB of the desktop or laptop computers. Furthermore, the multiple external input sources including S-Video, Video or A/V and Audio connectors allows the users to convert V8, DVD, and VCD video stream to your PC.

Features:

- USB 2.0 input
- All channel auto scan
- 16 Channels preview (TV Wall) allows user to select favorite show
- High speed USB 2.0 connector, no extra power required
- Noise Reduction & De-interlace technology create sharper and clearer image
- Time shifting, you wouldn't miss any part of program. Pause a live broadcast, the screen will go back where you pause when played back
- Friendly OSD interface and functional remote control
- MPEG-1, MPEG-2 and MPEG-4 Video capture can go over 2GB HDD limit
- Small size, pocket design

Rear view image:

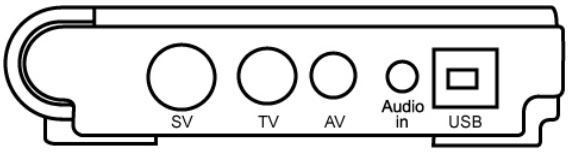

Specifications:

Model Name	ENUTV-2
TV format	NTSC, PAL, SECAM
Resolution	720x480(full D1), 640x480, 640x288, 640x240, 352x480 (Half D1), 352x288, 352x240 (SIF), 320x240, 240x180, 240x176, 176x144, 160x120
Video Compression	AVI, MPEG-1, MPEG-2, MPEG-4
RF Input	(75 ohm impedance, F or PH type) (By Mode)
TV input	(75 ohm impedance, F or PH type)
Video input	RCA video input / S-Video input
USB	USB connector Type B
Audio input	Phone jack

System Requirements:

- Interface: One available USB2.0 ports
- CPU: Pentium4 2.0GHz or equivalent AMD Athlon ™ CPU
- Operating Systems: Microsoft Windows® 7 / XP / Windows Vista™
- DirectX: Microsoft ® DirectX ® 9.0C
- Graphics Card : 1024x768, DirectX R 9.0c or above compatible graphics card
- Sound Card: AC97 compatible PCI sound card
- Hard Disc Drive: 100MB free hard disk space for installation, additional space required for video capture and Time-Shifting
- System Memory: 256MB of RAM or more is recommended
- CD or DVD ROM: For installing driver and application
- Antenna for analog TV